


Hooks

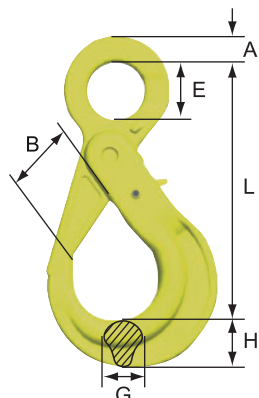

BK Safety Hook

Safety hook with self locking function. Hook does not open, when under load. The latch opens outward, so large wires and belt slings can be attached easily.

Product Code	WLL (t)	Chain Diameter (mm)	Dimensions (mm)						Weight (kg)
			L	B	E	A	G	H	
BK-6-10	1.2	6	109	29	22	11.5	15	21	0.5
BK-7/8-10	2.0	8	137	37	28	14	17	25	0.9
BK-10-10	3.2	10	168	45	34	16	21	30	1.5
BK-13-10	5.3	13	207	55	44	20	30	39	3.0
BK-16-10	8.0	16	254	62	56	26	37	48	5.5
BK-18/20-10	10.0	20	289	68	60	30	46	63	9.0
BK-22-10	12.0	22	320	80	70	32	50	62	11.3
BK-26-10	17.0	26	342	100	80	35	54	68	16.4
BK-32-8	20.0	32	400	120	90	40	62	86	23.3

How load is attached



1) Push down the trigger.




2) Open the latch.



3) Attach the load.



4) Latch closes securely.

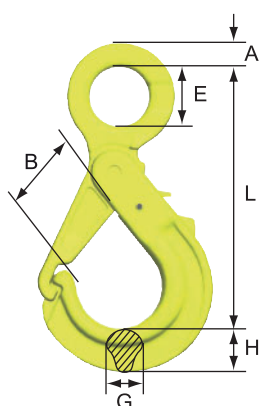

OBK Griplatch Hook

Safety hook with griplatch. Hook and latch interlock to prevent side movement of the latch and increase safety. In case of overloading, the misalignment of hook part and latch is a visible indicator.

Product Code	WLL (t)	Chain Diameter (mm)	Dimensions (mm)						Weight (kg)
			L	B	E	A	G	H	
OBK-6-10	1.2	6	103	26	22	11.5	15	17	0.4
OBK-7/8-10	2.0	8	139	37	28	13.5	20	22	0.8
OBK-10-10	3.2	10	170	47	34	15.5	22	29	1.3
OBK-13-10	5.3	13	206	53	44	20.5	28	37	2.6
OBK-16-10	8.0	16	251	68	56	25	29	45	4.4
OBK-18/20-10	10.0	20	294	74	60	28	44	56	8.3
OBK-22-8	12.0	22	335	87	70	30	40	57	10.2



The tip of the hook and the tip of the latch are interlocked and fit exactly.

In case of overloading, the hook and latch will no longer be able to interlock properly.