


LKNK Bearing Swivel Hook

Hook with ball bearing swivel, allowing for smooth rotation even under load.

Suitable for a wide range of applications.

Product Code	WLL (t)	Chain Diameter (mm)	Dimensions (mm)							Weight (kg)
			L	B	C	E	A	G	H	
LKNK-7/8-10	2.0	8	154	28	28	38	12	18	23	0.9
LKNK-10-10	3.2	10	191	35	35	44	15	23	30	1.6
LKNK-13-10	5.3	13	236	40	45	48	19	28	38	3.2
LKNK-16-10	8.0	16	293	53	62	61	25	34	43	5.5

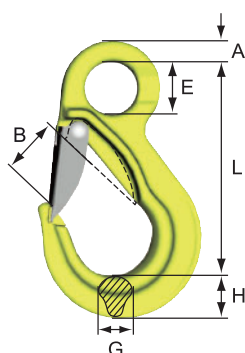


EKN Sling Hook

Sling hook with robust latch (thickness 3 mm to 5mm) and wide opening.

Wide range of sizes available – for working load limits from 1.2 ton to 32 ton.


Product Code	WLL (t)	Chain Diameter (mm)	Dimensions (mm)						Weight (kg)
			L	B	E	A	G	H	
EKN-6-10	1.2	6	93	25	22.5	10.5	17	20	0.4
EKN-7/8-10	2.0	8	109	26	28	13	17	23	0.6
EKN-10-10	3.2	10	134	36	34	15	23	30	1.0
EKN-13-10	5.3	13	166	42	44	19	28	38	2.1
EKN-16-10	8.0	16	203	52	56	25.5	36	47	4.0
EKN-18/20-10	10.0	20	229	61	61	26	42	59	6.4
EKN-22-10	16.0	22	267	73	64	32	43	67	8.9
EKN-26-10	22.0	26	301	82	66	32	51	75	13.1
EKN-32-10	32.0	32	353	96	90	47	61	98	25.2



OKE Foundry Hook

Hook with extra wide opening. Slings with big diameter can be attached easily.

Product Code	WLL (t)	Chain Diameter (mm)	Dimensions (mm)						Weight (kg)
			L	B	E	A	G	H	
OKE-7/8-10	2.0	8	124	63	28	11	21	26	0.8
OKE-10-10	3.2	10	151	76	34	14	26	29	1.4
OKE-13-10	5.3	13	184	90	44	18	33	39	2.8
OKE-16-10	8.0	16	218	102	56	22	40	46	4.9
OKE-18/20-10	10.0	20	247	114	60	29	46	60	7.1
OKE-22-10	16.0	22	275	120	64	32	60	70	11.3
OKE-26-10	21.6	26	300	113	70	35	64	77	16.0
OKE-32-8	25.0	32	384	145	80	48	77	93	35.0

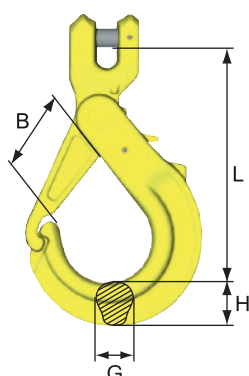

GBK Griplatch Hook

Clevis type safety hook with griplatch. Hook and latch interlock to prevent side movement of the latch and increase safety. In case of overloading, the misalignment of hook part and latch is a visible indicator.

Product Code	WLL (t)	Chain Diameter (mm)	Dimensions (mm)				Weight (kg)
			L	B	G	H	
GBK-6-10	1.1	6	87	26	15	17	0.4
GBK-8-10	2.0	8	119	37	20	22	0.8
GBK-10-10	3.2	10	149	47	22	29	1.3
GBK-13-10	5.2	13	172	53	29	38	2.7
GBK-16-10	8.0	16	208	68	30	45	4.4