
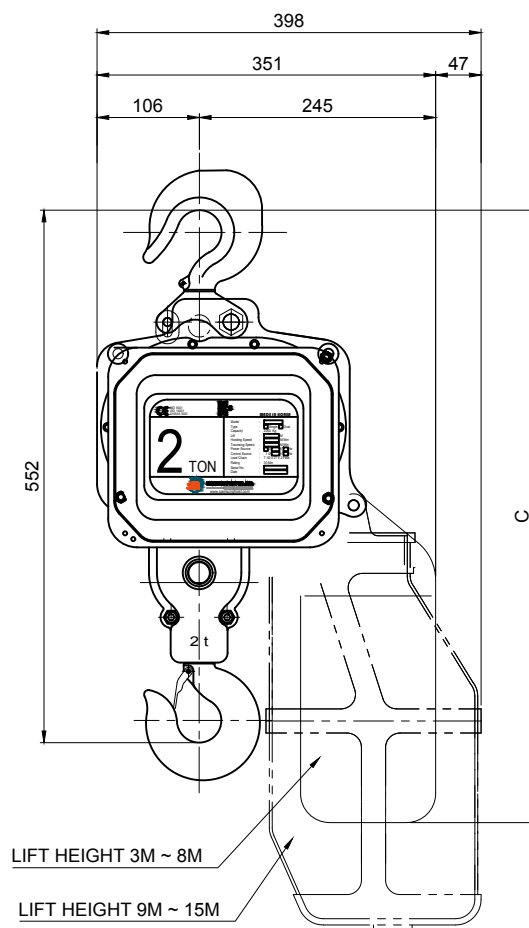


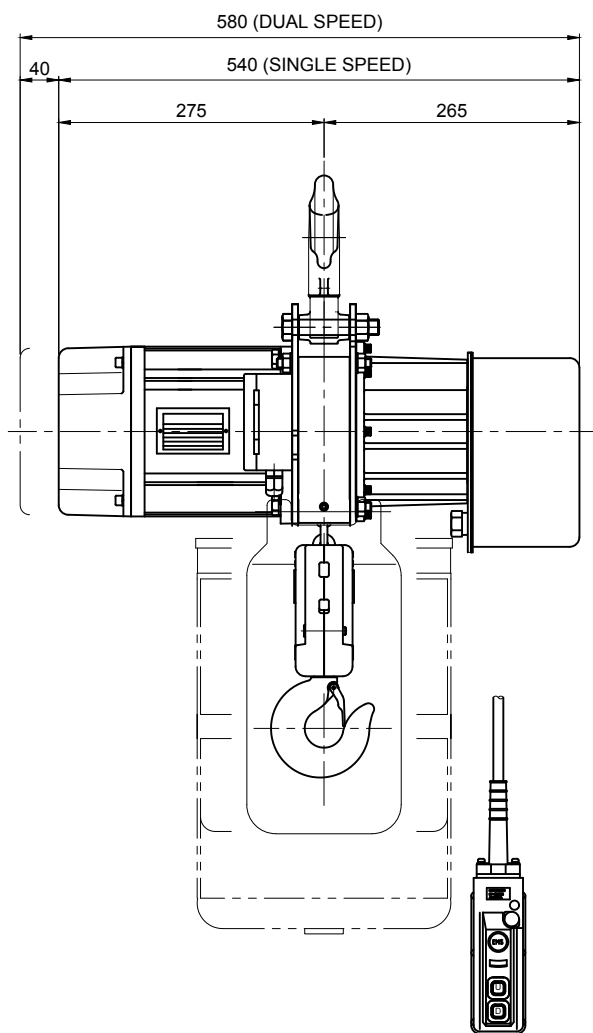

| SPECIFICATION    |        |                          |                     |                    |
|------------------|--------|--------------------------|---------------------|--------------------|
| HOISTING LOAD    |        |                          | 2 TON               |                    |
| TESTING LOAD     |        |                          | 2.5 TON             |                    |
| LIFTING HEIGHT   |        |                          | MAX. 70 M           |                    |
| HOISTING         | HERTZ  |                          | 50 Hz               | 60 Hz              |
|                  | SINGLE | SPEED                    | 2.9 M/MIN           | 3.5 M/MIN          |
|                  |        | MOTOR                    | 1.25 Kw * 4P        | 1.5 KW * 4P        |
|                  | DUAL   | SPEED                    | 2.9 / 1.5 M/MIN     | 3.5 / 1.8 M/MIN    |
|                  |        | MOTOR                    | 1.25/0.63 Kw * 4/8P | 1.5/0.75 KW * 4/8P |
| POWER SUPPLY     |        | 3Ø 220V ~ 575V           |                     |                    |
| CONTROL VOLTAGE  |        | 1Ø 48V, 110V             |                     |                    |
| OPERATING METHOD |        | PUSH BUTTON TYPE         |                     |                    |
| LOAD CHAIN SPEC. |        | Ø7.1 * 21P * 2 FALLS     |                     |                    |
| RATING           |        | 30 MIN.                  |                     |                    |
| NET. WEIGHT      |        | MIN. 68 KG ~ MAX. 222 KG |                     |                    |

| DIMENSIONS |                |          |           |              |
|------------|----------------|----------|-----------|--------------|
|            | LIFTING HEIGHT |          |           |              |
|            | 3M ~ 8M        | 9M ~ 15M | 16M ~ 26M | 27M ~        |
| C          | 635            | 725      | 925       | STEEL BUCKET |