
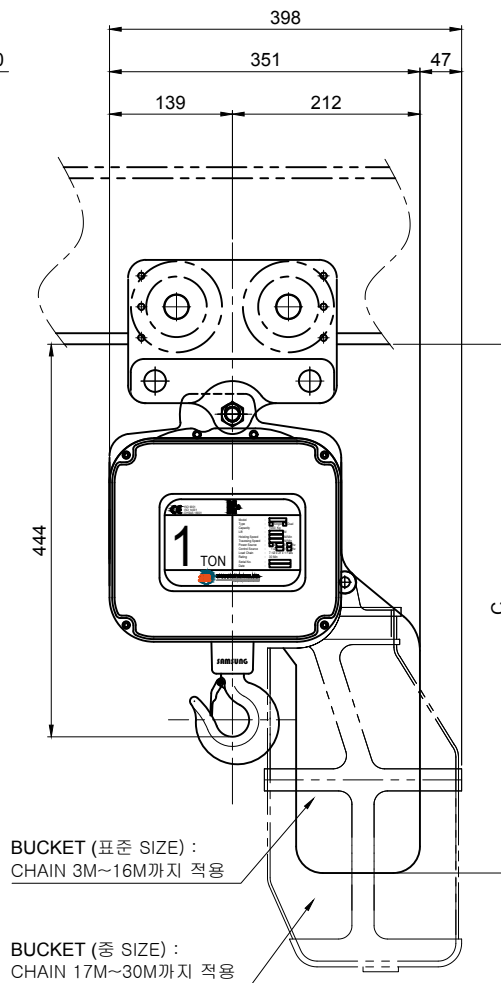


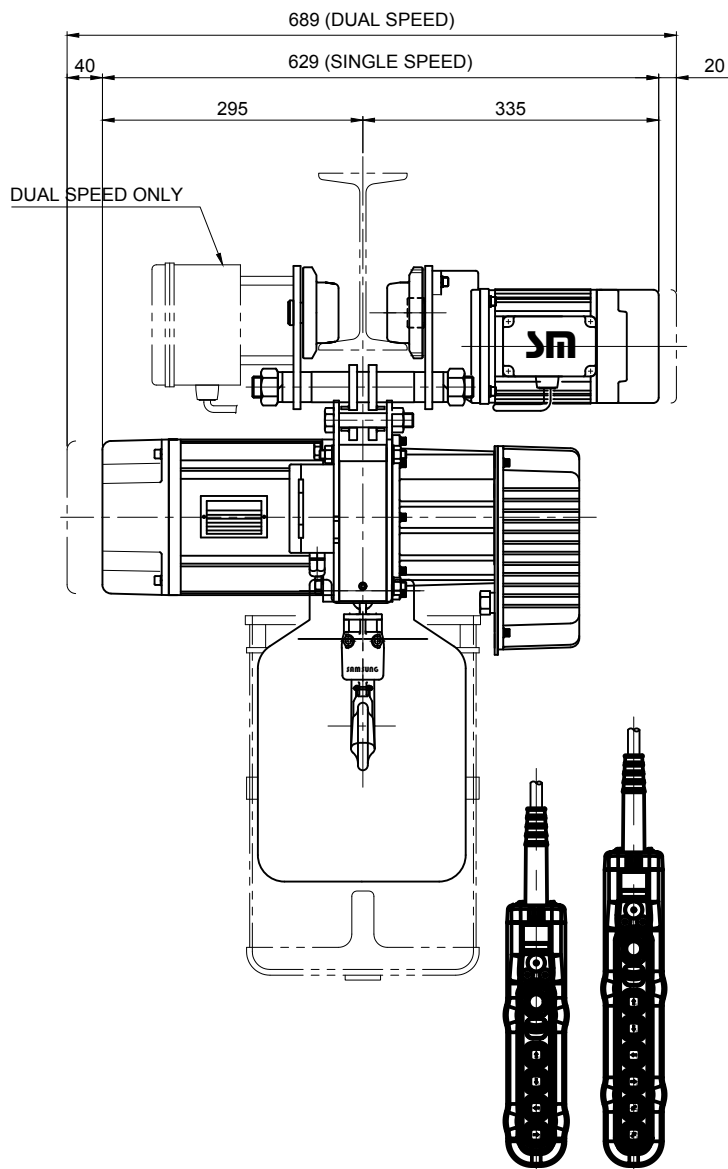

SPECIFICATION				
HOISTING LOAD			1 TON	
TESTING LOAD			1.25 TON	
LIFTING HEIGHT			MAX. 100 M	
HOISTING	HERTZ		50 Hz	60 Hz
	SINGLE	SPEED	5.8 M/MIN	7.0 M/MIN
		MOTOR	1.25 Kw * 4P	1.5 Kw * 4P
	DUAL	SPEED	5.8 / 2.9 M/MIN	7.0 / 3.5 M/MIN
		MOTOR	1.25/0.63 Kw * 4/8P	1.5/0.75 Kw * 4/8P
TRAVERSING	FAST	SPEED	16.7 M/MIN	20.0 M/MIN
		MOTOR	0.33 Kw * 4P	0.4 Kw * 4P
	MIDDLE	SPEED	11.1 M/MIN	13.3 M/MIN
		MOTOR	0.22 Kw * 6P	0.27 Kw * 6P
	SLOW	SPEED	8.3 M/MIN	10.0 M/MIN
		MOTOR	0.17 Kw * 8P	0.2 Kw * 8P
	DUAL	SPEED	16.7 / 8.3 M/MIN	20.0 / 10.0 M/MIN
		MOTOR	0.33/0.17 Kw * 4/8P	0.4/0.2 Kw * 4/8P
POWER SUPPLY		3Ø 220V ~ 575V		
		1Ø 110V, 220V		
CONTROL VOLTAGE		1Ø 48V, 110V		
OPERATING METHOD		PUSH BUTTON TYPE		
LOAD CHAIN SPEC.		Ø7.1 * 21P * 1 FALL		
I-BEAM WIDTH		75mm ~ 125mm		
RADIUS OF BEAM		MIN. 1200mm		
RATING		30 MIN.		
NET. WEIGHT		MIN. 86 KG ~ MAX. 200 KG		

DIMENSIONS				
	LIFTING HEIGHT			
	3M ~ 16M	17M ~ 30M	31M ~ 50M	
C	600	690	890	