


REV	DATE	REASON FOR REVISION	CHECKER BY	APPROD BY
△				

SPECIFICATION				
HOISTING LOAD		2.5 TON		
TESTING LOAD		3.12 TON		
LIFTING HEIGHT		Min. 3 M ~ Max 30 M		
HOISTING	SINGLE	SPEED	3.5 M/MIN	
		MOTOR	2.0 Kw x 4 P	
	DUAL	SPEED	3.5 / 1.1 M/MIN	
		MOTOR	2.0 / 1.0 Kw x 4 / 8 P	
TRAVERSING	FAST	SPEED	19.0 M/MIN	
		MOTOR	0.4 Kw x 4 P	
	MIDDLE	SPEED	12.0 M/MIN	
		MOTOR	0.27 Kw x 6 P	
	SLOW	SPEED	9.0 M/MIN	
		MOTOR	0.2 Kw x 8 P	
	DUAL	SPEED	19 / 9.5 M/MIN	
		MOTOR	0.4/0.2 Kw x 4/8 P	
POWER SUPPLY		30~220~575V~60Hz 1Ø -48V, 220V~60Hz		
CONTROL VOLTAGE		1Ø -48, 110V -60Hz		
OPERATING METHOD		PUSH BUTTON TYPE		
LOAD CHAIN SPEC.		Ø7.1 x 21P x 2 FALL		
WIDTH OF BEAM		100~150 mm		
RADIUS OF BEAM		MIN. 1500 mm		
RATING		30 MIN.		
NET WEIGHT		APPROX Min. 115Kg~Max. 208Kg		

DIMENSIONS					
구분		양정(LIFT)			
기종	3W~8M	8M~15M	15M~25M		
	C	610	700	900	

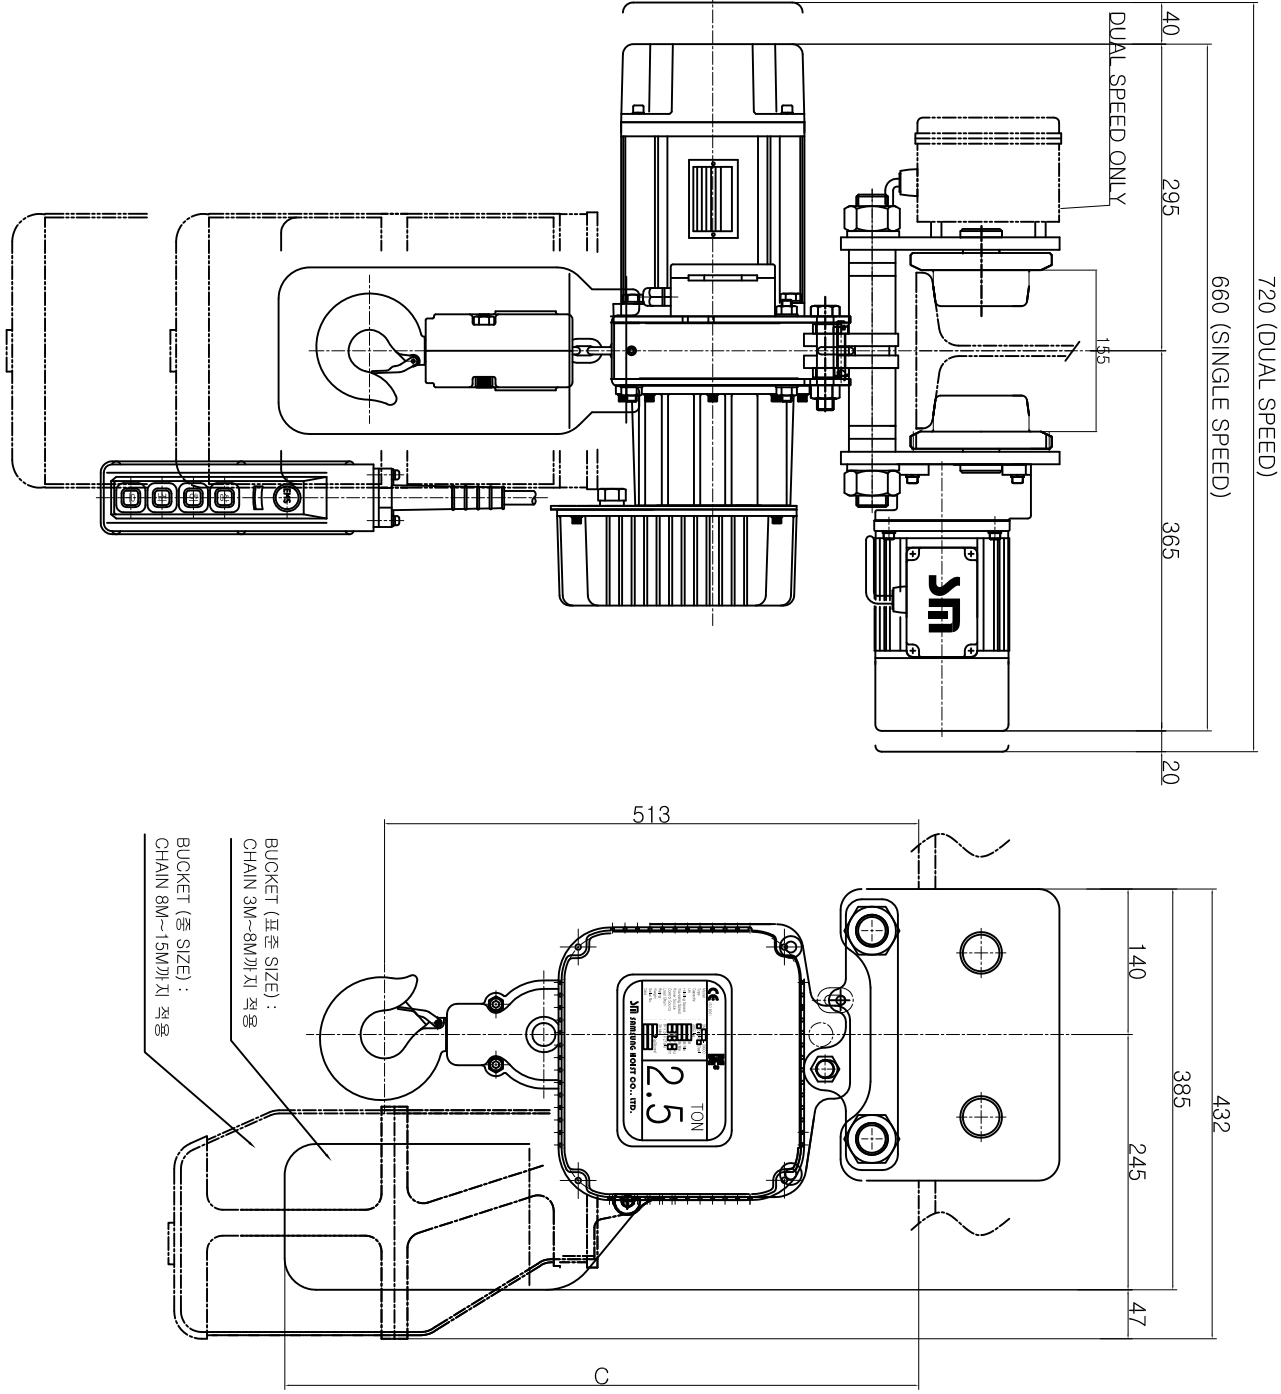

NO.	DESCRIPTION	MATL.	SIZE	Q'TY	REMARKS
DESIGNED	CHECKED	SCALE	DWG. NO.		
APPROVED		1/1			
정영환	김민	DATE			
		2010.08.27			



TITLE OF PROJECT
2.5 TON MOTOR TROLLEY TYPE
ELEC. CHAIN HOIST GENERAL ASSEMBLY

SCT-2500D