
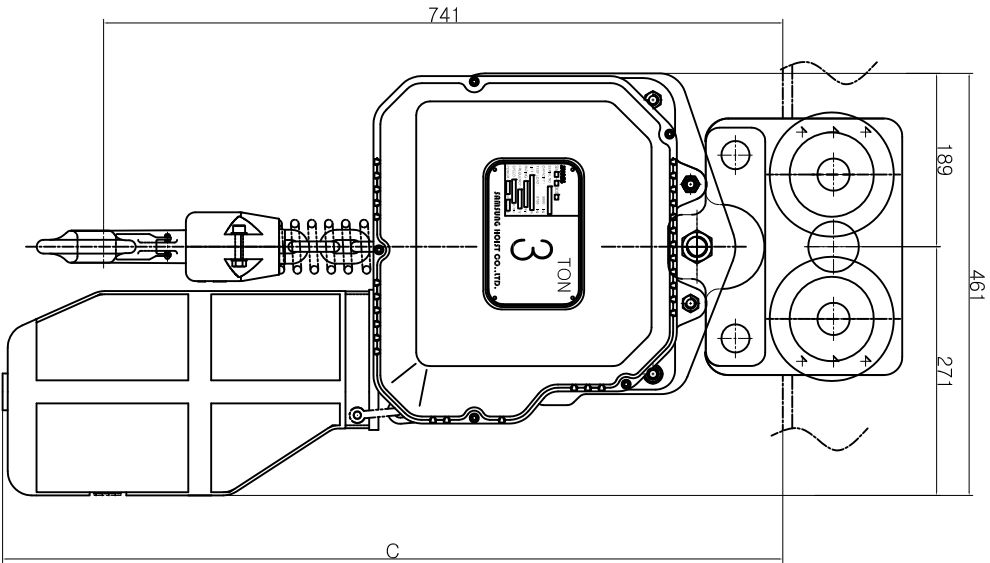


REV	DATE	REASON FOR REVISION	CHECKER BY	APPROD BY
△				

SPECIFICATION

SPECIFICATION			
HOISTING LOAD	3 TON		
TESTING LOAD	3.75 TON		
LIFTING HEIGHT	Min. 3 M ~ Max 30 M		
HOISTING	SINGLE	SPEED	6.0 M/MIN
		MOTOR	3.5 Kw x 4 P
	DUAL	SPEED	6.0 / 3.0 M/MIN
TRAVERSING	MOTOR	3.5 / 1.75 Kw x 4 / 8 P	
	SPEED	19.0 M/MIN	
	MOTOR	0.4 Kw x 4 P	
	SPEED	12.0 M/MIN	
	MOTOR	0.27 Kw x 6 P	
	SPEED	9.5 M/MIN	
	MOTOR	0.2 Kw x 8 P	
	SPEED	19 / 9.5 M/MIN	
	MOTOR	0.4 / 0.2 Kw x 4 / 8 P	
	MAIN POWER		
	3Ø- 220~575V - 60Hz		
	CONTROL POWER		
	1Ø - 48V, 110V -60Hz		
	OPERATING METHOD		
	PUSH BUTTON TYPE		
LOAD CHAIN SPEC.			
Ø11.2 x 34P x 1 FALLS			
RATING			
30 MIN			
I-BEAM WIDTH (mm)			
125~150 mm			
NET WEIGHT			
MAX. 295 KG			

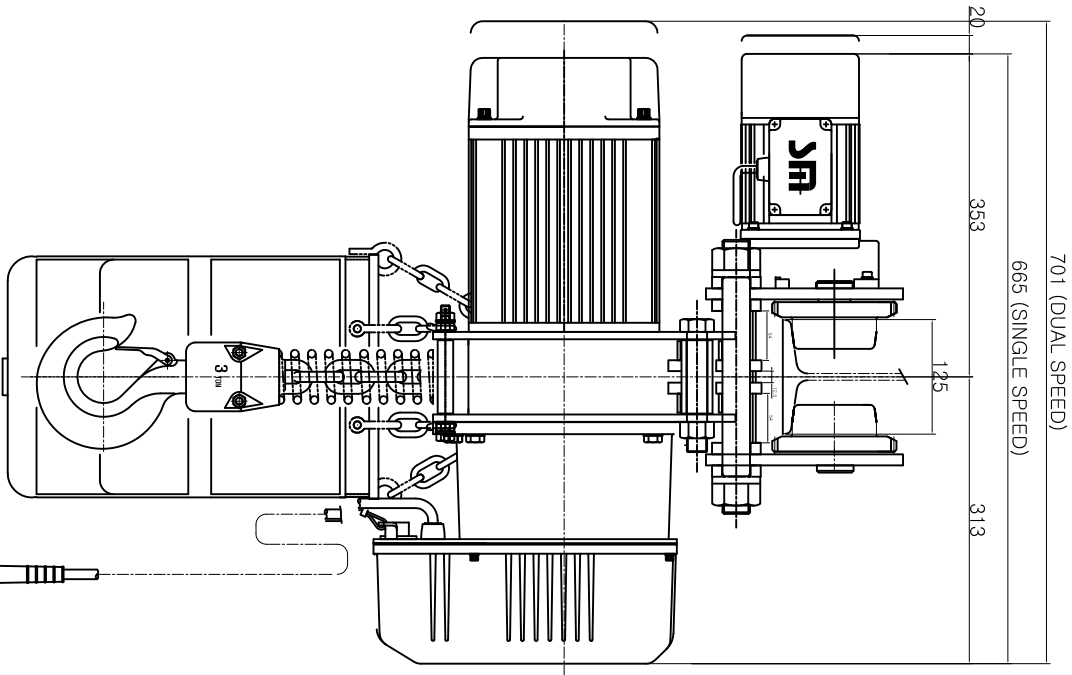

DIMENSION			
구분	양 정 (LIFT)		
	4M~14M	14M~20M	
기 호			
C	850	1050	

SCT-3000

NO.	DESCRIPTION	MATL.	SIZE	QTY	REMARKS
DRAWING NO.	CHECKED	SCALE	DWG. NO.		
DESIGNED	APPROVED	1/1			
정영환	2013.05.27				
					SCT-3000