


BKL Swivel Hook

Safety hook with swivel. The thrust washer ensures smooth rotation and removes twists in chain slings and belt slings before the load is applied, preventing damage to the sling. When using with a wire sling that generates a rotational force due to rewinding when load is applied, please use our swivel hook with bearing (BKLK) that ensures smooth rotation even when under load.


Product Code	WLL (t)	Chain Diameter (mm)	Dimensions (mm)							Weight (kg)
			L	B	C	E	A	G	H	
BKL-6-10	1.2	6	149	29	22.5	33	11	15	21	0.7
BKL-7/8-10	2.0	8	183	37	27	38	12	17	25	1.2
BKL-10-10	3.2	10	218	45	37	44	15	21	30	2.0
BKL-13-10	5.3	13	281	55	47	47	19	30	39	4.0
BKL-16-10	8.0	16	341	62	65	62	23	37	48	7.2
BKL-18/20-10	10.0	20	368	68	69	72	31	46	63	11.2

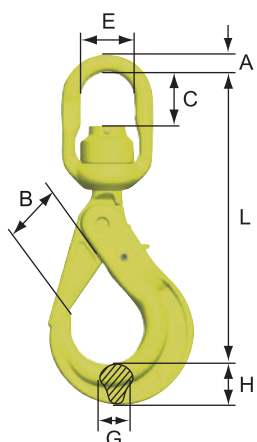

BKLK Bearing Swivel Hook

Safety hook with ball bearing swivel, allowing for smooth rotation even under load, expanding the range of possible applications.


Product Code	WLL (t)	Chain Diameter (mm)	Dimensions (mm)							Weight (kg)
			L	B	C	E	A	G	H	
BKLK-6-10	1.2	6	149	29	23	33	11	15	21	0.7
BKLK-7/8-10	2.0	8	183	37	27	38	12	17	25	1.2
BKLK-10-10	3.2	10	218	45	35	44	15	21	30	2.0
BKLK-13-10	5.3	13	280	55	45	48	19	30	39	4.0
BKLK-16-10	8.0	16	339	62	61	61	23	37	48	7.2
BKLK-18/20-10	10.0	20	367	68	60	72	31	46	63	11.3
BKLK-22-10	12.0	22	436	79	80	80	35	50	62	16.8
BKLK-26-10	17.0	26	486	100	110	102	45	54	68	26.4

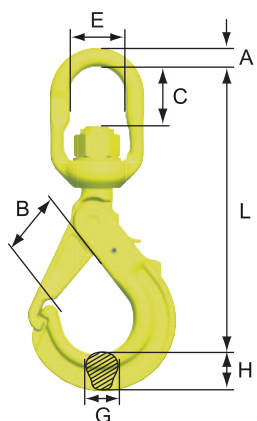

LBK Griplatch Swivel Hook

Safety hook with swivel and griplatch. Hook and latch interlock to prevent side movement of the latch and increase safety. In case of overloading, the misalignment of hook part and latch is a visible indicator. When using with a wire sling that generates a rotational force due to rewinding when load is applied, please use our griplatch swivel hook with bearing (LKBK) that ensures smooth rotation even when under load.

Product Code	WLL (t)	Chain Diameter (mm)	Dimensions (mm)							Weight (kg)
			L	B	C	E	A	G	H	
LBK-7/8-10	2.0	8	178	37	27	38	12	20	22	1.1
LBK-10-10	3.2	10	214	47	36	44	15	22	29	1.8
LBK-13-10	5.2	13	265	54	47	48	19	29	35	3.8
LBK-16-10	8.0	16	324	68	66	61	25	29	45	6.1

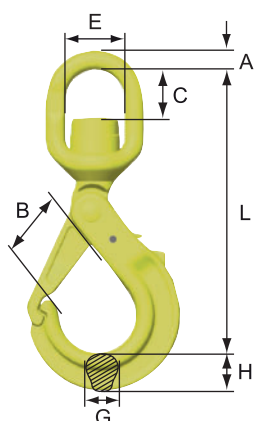

LKBK Bearing Griplatch Swivel Hook

Safety hook with griplatch and ball bearing swivel. In case of overloading, the misalignment of hook part and latch is a visible indicator. As it rotates smoothly even under load, it is suitable for a wide range of applications.

Product Code	WLL (t)	Chain Diameter (mm)	Dimensions (mm)							Weight (kg)
			L	B	C	E	A	G	H	
LKBK-7/8-10	2.0	8	179	37	27	38	12	20	22	1.2
LKBK-10-10	3.2	10	214	47	35	44	15	22	29	1.8
LKBK-13-10	5.2	13	264	54	46	48	19	29	35	3.8
LKBK-16-10	8.0	16	319	68	61	61	25	29	45	6.0